HOT WATER HEATER

100% made in Malaysia DOSH and DOE regulations complied

6 seasons or 3 years Guarantee,

(whichever come first.)



Operating under atmospheric pressure (no pressure).

Design granted exclusion by JKKP and no certified boiler man require operating the boiler Low operating costs.

Long, huge and separated furnace and heat exchanger.


- Allow husk to burn well using gentle blowing air; hence ashes will not fly around and sucked into heat exchanger. Clean hot air which enter into fire tubes will further prolong its life
- 12 step pushing grate stoker allow enough time for rice husk to hum completely.

The pushing grate is design for robust and long lasting usage. Bearing roller

carriage which moves the pushing grates will ensure a smooth stoker movement and require very little effort to move it around, more over the stoker is controlled by hydraulic cylinders, further enhance the durability and smoothness of the stoker movement.

Water Jackets pushing grate.

Husk burning on top of the water jackets resulting in longer life span of the furnace and also efficient transfer of heat.

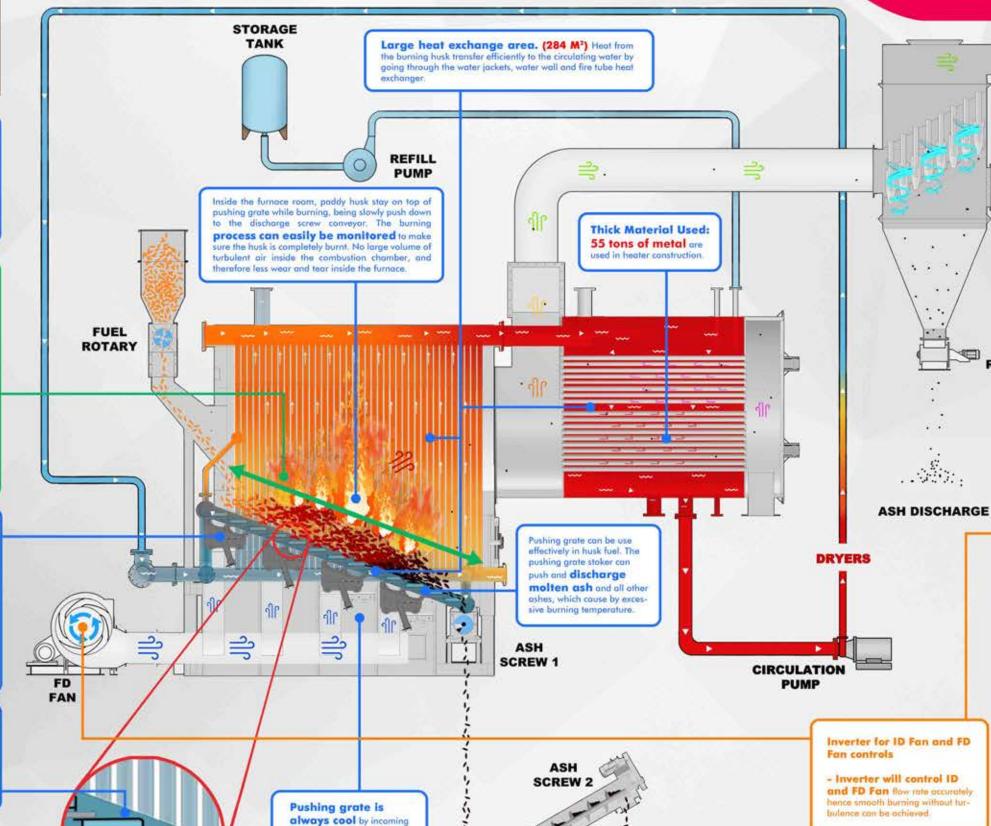



Normal operator

ASH

ROTARY

FAN

with less education qualification can operate the heater by pressing only 1 button for start and stop of the heater operation. Operator only needs to set the required water temperature and the boiler operate automatically by adjusting the air valume and husk input quantity.



CHIMNEY

198501004398 (136837-P)

Ву

FD fan and water jacket.

sive heat and disconnec

from hot burning husk.

When pushing grate is not running, it will retract under

water jacket to avoid exces-

ASH DISCHARGE